



FIXING THE COVER OF YOUR DUPLICATOR 6.


1. To install the cover of D6 printe, you need the 1 front cover,2 side covers,2 top covers and a tool bag where you can find one handle,two hinges,ten M4*16 screws, five M4 nuts,ten M5*10 screws,M4*5 screws, one 2.5mm hex wrench, one 3mm hex wrench and one 4mm hex wrench.

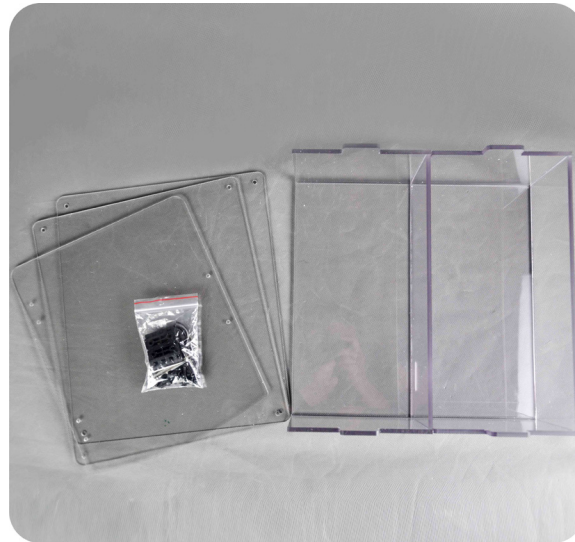

2. To install the front cover, you need one front cover,two M4*5 screws,eight M4*16 screws,four M4 nuts,one 2.5mm hex wrench,3.0mm hex wrench,two hinges, and one handle.

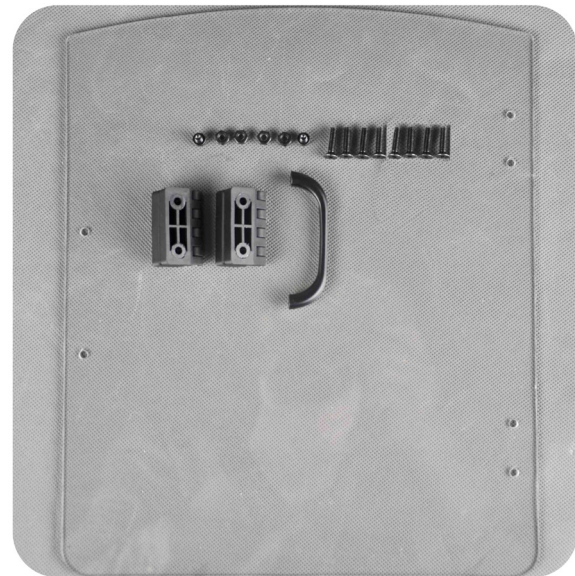

3. To install the side cover, you need two side covers,eight M5*10 screw and a 4mm hex wrench.

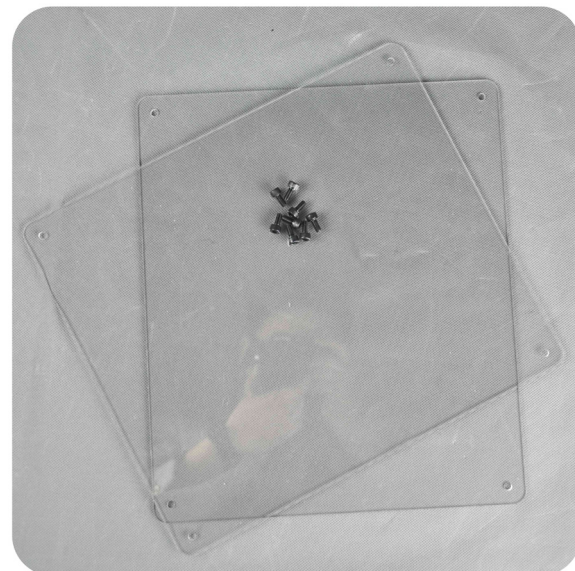

4. Use M4*16 screw and M4 nut To fix the hinge on the front cover. In this step, you need 4 M4*16 screws and 4 M4 nuts for the two handles.



5. Use M4*5 screw and 3mm hex wrench to fix the handle on the front cover. In this step, you need two M4*5 screws.



6. Fix the front cover on the printer with the 2.5mm hex wrench and another four M4*16 screws.



7. To do the same to the other handle.




8. Check the front cover if it works.




9. Fix the side cover with the 4mm hex wrench and M5*10 screw.
NOTE: You should not fix the first three screws too tight at first.



10. To do the same to the other three screws and get them tight.

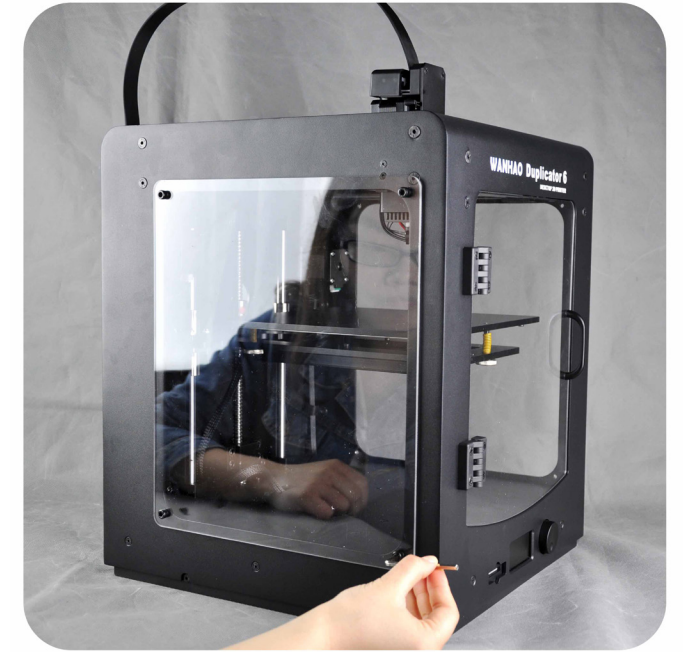

11. Do the same to the other side cover.

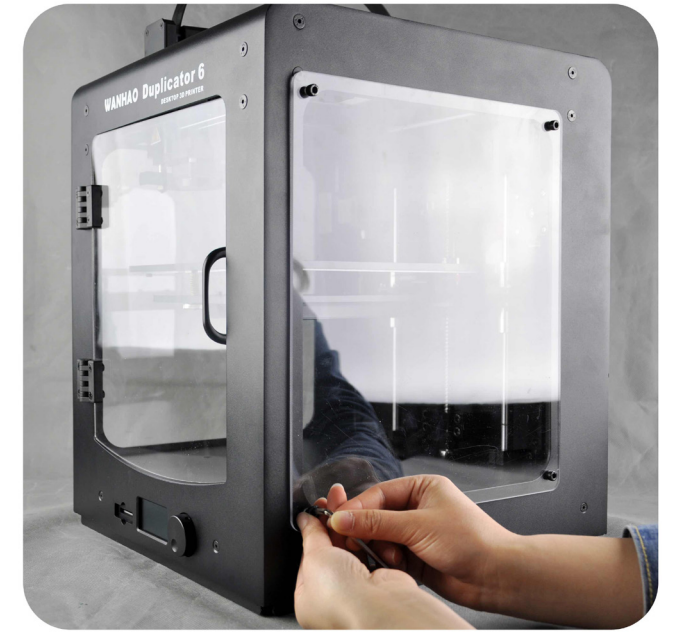

12. Put one of the top cover on the printer aiming at the hole on the two sides.



13. To do the same to the other top cover.



14. That's a finished work.
NOTE: In the tool bag, you have two M4*16 screws, two M5*10 screws, one M4*5 screw and one M4 nut for alternative use.

